

技术说明：


阻值范围：3 - 500
 阻值精度：±1% ±2% ±5% ±10%
 尺寸精度：±0.010 英寸
 输入功率：功率 25 到 150 功率降为零
 功率基于 100
 工作温度：-55 - +150
 温度系数：100 PPM/

材料说明：

电阻材料：专有薄膜
 底层：钎氧化物
 接线端：镍上镀锡

符合 MIL-R-55342

标准选型表

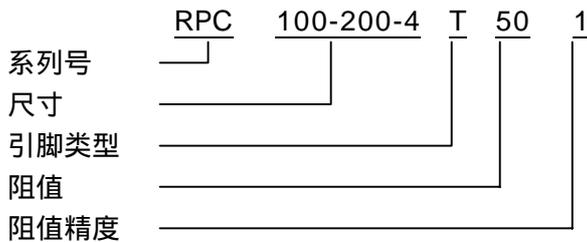

尺寸 (英寸)	W	L	T	A	B	C	CW Power	RO /w
100-200-4	.100	.200	.040	.100	.040	.040	75	0.80
230-350-4	.350	.230	.040	.187	.040	.040	165	0.35
250-250-4	.250	.250	.040	.187	.040	.040	188	0.30
250-250-6	.250	.250	.062	.187	.040	.040	112	0.45
250-375-4	.250	.375	.040	.220	.060	.060	250	0.15
250-375-1	.250	.375	.135	.220	.060	.060	120	0.50
375-375-4	.375	.375	.040	.250	.060	.060	340	0.11
500-500-4	.500	.500	.040	.375	.060	-	540	0.07
1000-1000-6	1.00	1.00	.060	.412	.090	-	750	0.05

